





DORANI DORVT15 LOCK MODULE WIRING DIAGRAM AND PROGRAMMING

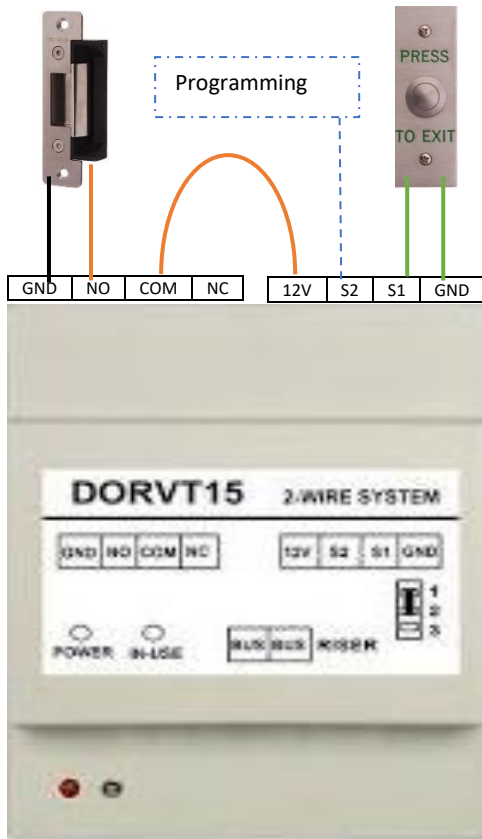


This Jumper must be left in for 12v connection

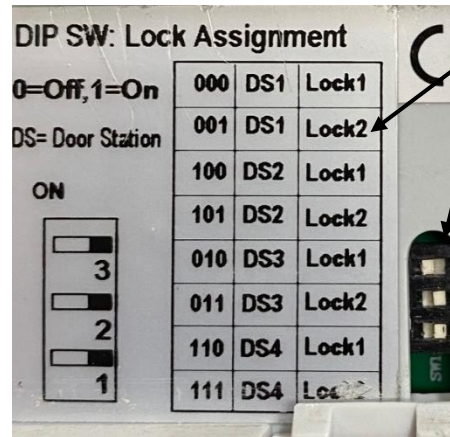

Preset as Door 1, Lock 2

To make the lock module Door 1, Lock 1. All dipswitches are set to 0 (all on the right hand side)

Adjusting Time of the Relay Output
 Default = 3 Seconds
 1) Power Up Module - within 5 seconds Short S2 & GND for 3 Seconds (IN USE will Flash)
 2) Short S1 & GND for 3 Seconds (IN USE will go SOLID)
 3) Short S2 & GND for time period desired 1 - 30 Seconds (IN USE will flash for time period)
 4) Release of S2 will save the settings and exit programming mode



To BUS connection on DORVT09 module. The BUS terminals are COMMON through the system. You can connect the BUS to any other BUS terminals on other modules, NO POLARITY