


DORIP-12

16 CHANNEL 4K NETWORK
VIDEO RECORDER



KEY FEATURES

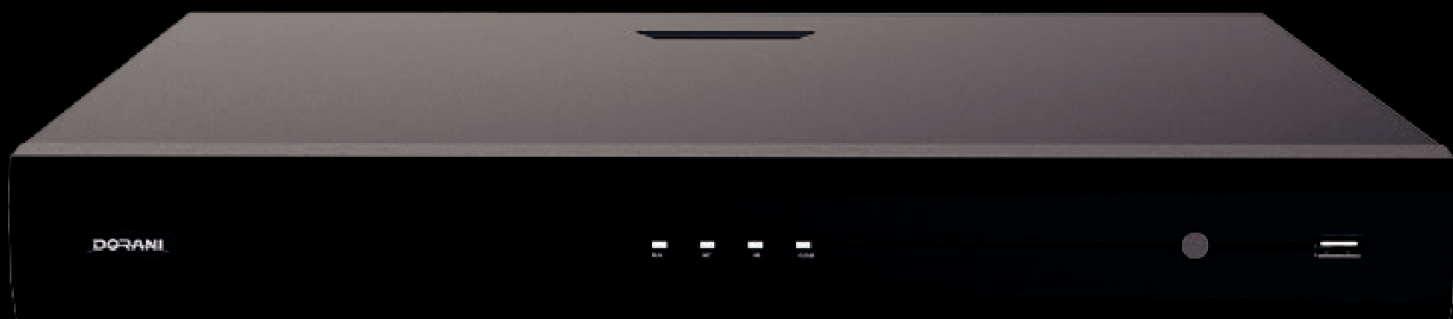

DORIP - 12

16 CHANNEL 4K NETWORK VIDEO RECORDER


- Support Ultra 265/H.265/H.264 video formats
- Plug and Play with 16 Channel POE Input
- Third-party IP cameras supported with ONVIF conformance: Profile S, Profile G, Profile C, Profile Q, Profile A, Profile T
- Support 1-ch HDMI, 1-ch VGA, HDMI at up to 4K(3840x2160) resolution
- HDMI and VGA simultaneous output
- Up to 8 Megapixels resolution recording
- 2 SATA HDDs, up to 8TB for each HDD
- ANR technology to enhance the storage reliability when the network is disconnected
- Support cloud upgrade
- 2TB SURVEILLANCE RATED HDD INCLUDED - STANDARD
- P2P Mobile Device Phone Connection IOS & Android

SPECIFICATIONS

D O R I P - 1 2		
V I D E O / A U D I O I N P U T		
IP Video Input	8-ch	16-ch
Two-way Audio Input	1-ch, RCA	
N E T W O R K		
Incoming Bandwidth	64Mbps	112Mbps
Outgoing Bandwidth	96Mbps	96Mbps
Remote Users	128	
Protocols	P2P, UPnP, NTP, DHCP, PPPoE,SSL,TLS,HTTPS	
V I D E O / A U D I O O U T P U T		
HDMI/VGA Output	VGA: 1024X768@60,1280X720@60,1280X1024@60,1920X1080@50,1920X1080@60 HDMI: 4k(3840x2160@30),4k(3840x2160@60),1024X768@60,1280X720@60,1280X1024@60,1920X1080@50,1920X1080@60	
Recording Resolution	8MP/6MP/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF	
Audio Output	1-ch, RCA	
Synchronous Playback	8-ch	16-ch
Corridor Mode Screen	3/4/5/7/9	3/4/5/7/9/10/12/16
D E C O D I N G		
Decoding format	Ultra265/H.265/H.264	
Live view/ Playback	8MP/6MP/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF	
Capability	1 x 4K@30, 2 x 4MP@30, 3 x 3MP@25, 4 x 1080P@30, 8 x 720P@30,16 x D1	
H A R D D I S K		
SATA	2 SATA interfaces	
Capacity	up to 8TB for each disk	
S M A R T		
VCA Detection	Face detection, Intrusion detection, Cross line detection, Audio detection, Defocus detection, Scene change detection, Auto tracking	
VCA Search	Face search, Behavior search	
Statistical Analysis	People counting	
E X T E R N A L I N T E R F A C E		
Network Interface	1 RJ-45 10M/100M/1000M self-adaptive Ethernet Interface	
USB Interface	Front panel: 1 x USB2.0, Rear panel: 1 x USB2.0	
Alarm In	4-ch	
Alarm Out	1-ch	

P O E		
Interface	8 independent 100Mbps PoE network interfaces	16 independent 100Mbps PoE network interfaces
Max Power	Max 30W for single port Max 130W in total (16.25W for each)	Max 30W for single port Max 240W in total (15W for each)
Supported Standard	IEEE 802.3af/at	
G E N E R A L		
Power Supply	220V AC Power Consumption: ≤9 W(without HDD)	
Working Environment	-10°C ~ + 55°C (+14°F ~ +131°F), Humidity ≤ 90% RH(non-condensing)	
Dimensions(W×D×H)	380mm ×315mm × 49.1mm(15.0" × 12.4" ×1.9")	
Weight (without HDD)	≤2.4kg (5.29 lb)	
Warranty	2 Years as per Dorani Pty Ltd Standard Terms and Conditions	

DIMENSIONS

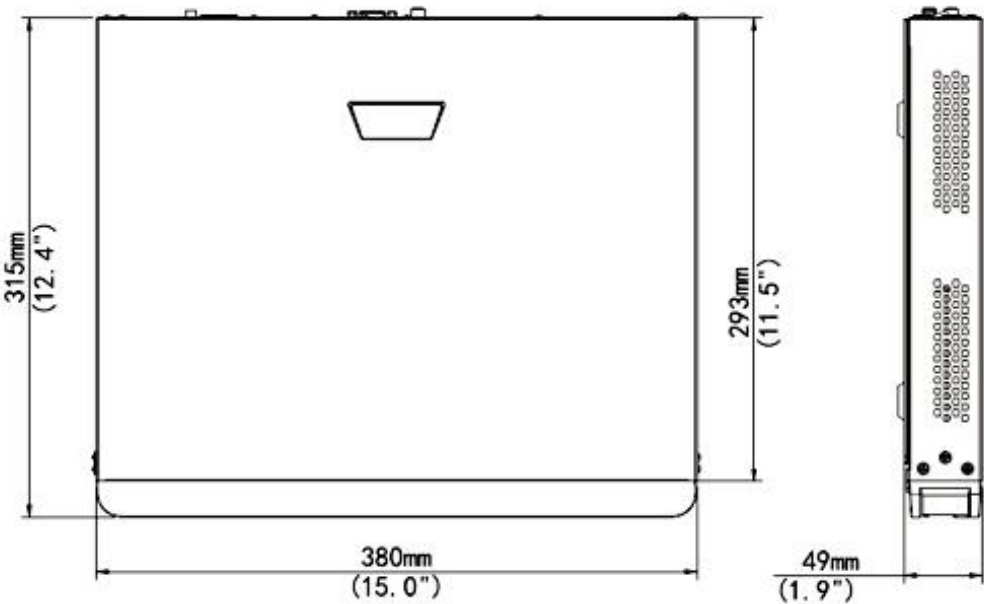

*Product specifications and availability are subject to change without notice.